



KITCHEN PLINTH HEATER MODELS

KPH-1300B (Basic)

KPH-1500C, KPH-1800C, KPH-2100C & KPH-2400C (Classic)

KPH-1500W, KPH-1800W, KPH-2100W & KPH-2400W (Wireless)

KPH-1500 SW & KPH-1800SW, KPH-2100SW, KPH-2400SW (Smart WiFi)

KPH-1400 LV DC (Low Voltage)



FEATURES:

- Fits neatly under kitchen plinth cabinet
- Low operating noise levels
- Two speed (Classic & Wireless models)
- Low Voltage DC models
- Controllable via wireless room thermostat (wireless models only)
- Works with smart speakers (ie Amazon echo)
- App based controller (Optional for Wireless models) – Control your plinth heater from your Smartphone
- Grille colour options – White, Black, Anthracite, Silver, Brushed Stainless Steel and self colour
- Supplied with Flexible hoses – 900mm long
- Integrated water temperature sensor
- Sleek front grille design - 7mm depth

A highly energy efficient fan convector that fits into the plinth of a kitchen unit eliminating the need for conventional radiators. This brings considerable space saving to allow you to design your kitchen. Kitchen plinth heaters are predominantly used in domestic applications where the plinth mounting feature makes it ideal for heating kitchens, utility rooms and bathrooms. Plinth heaters are also suitable for certain non-domestic application's such as office reception areas, and restaurant seating areas.

Own innovative wireless range (Patent GB2560762) which allows the user to set desired room temperatures where the unit is installed. This gives better temperature control in the area where the heater is fitted and saves the need to bend down to control the unit.

Thermix proudly launched it's Patented voice controlled plinth heater. If you want an even more convenient way to control your heater, you can connect this heater to Amazon echo or Google home systems. This allows you to control your heater with voice commands.



DESIGNED AND MADE
IN GREAT BRITAIN



WIRELESS THERMOSTAT



COMPATIBLE WITH BOTH
TRADITIONAL BOILERS
AND HEAT PUMPS



PEACE OF MIND
WARRANTY



APP CONTROLLABLE



2 SPEED FAN CONTROL



ENERGY EFFICIENT
COMPARED TO
TRADITIONAL RADIATORS



ULTRA LOW POWER
DC FANS WITH
CONSUMPTION UNDER 4
WATTS PER HOUR



VOICE CONTROL, USING
AMAZON OR GOOGLE
HOME SYSTEMS

HYDRONIC – BASIC MODEL (KPH-1300B)

Our KPH 1300 basic model is made with a simple on/off switch for people who just want the simple operation. This model gives the heat output of 1.30 kW. This basic model has integral water temperature switch to activate the heater when the central heating system comes on.



HYDRONIC – CLASSIC MODELS (KPH-1500C, KPH-1800C, KPH-2100C & KPH-2400C)

All of our KPH hydronic models can be integrated straight into your existing central heating system. We currently offer four models in the classic hydronic range providing outputs from 1.2 kW to 2.4kW. Our classic models come with a two speed option and integral water temperature switch to activate the heater when the central heating system comes on.



HYDRONIC – WIRELESS MODELS (KPH-1500W, KPH-1800W, KPH-2100W & KPH-2400W)

Our Patented wireless models give better control of room temperature where the heater is fitted. The wireless thermostat allows you to set the desired room temperature and the plinth heater will switch on/off automatically. All the other features are the same as our classic models (i.e. outputs, fan speeds, integral temperatures sensor and system integration).



HYDRONIC - SMART WIFI MODELS (KPH-1500SW, KPH-1800SW, KPH-2100SW & KPH-2400SW)

With all the features that come with our wireless models, our smart Wi-Fi range is an even more convenient way to control your plinth heater. Once connected with your Amazon echo or Google home system you will be able to control the heater using voice commands.



HYDRONIC – LOW VOLTAGE MODEL (KPH-1400LVDC)

This model can be installed in high humidity areas such as bathrooms and en-suites. With a depth of just 215mm it is able to be fitted into vanity units or under the bath. Our Hydronic low voltage model provides an output of 1.4kW. This Low voltage model comes with a simple on/off switch providing a single fan speed control. Ultra low operating sound level of 25dba makes this heater ideal choice for bedrooms.



CONTROLS AND ACCESSORIES

GRILLE COLOUR OPTIONS

We currently offer the grilles in six different finishes, white, black, metallic grey, brushed stainless steel, anthracite and self colour.



WIRELESS THERMOSTAT

Our wireless models are supplied with a wireless room thermostat to activate the heater unit depending on the room temperature.


Note: If you need to control multiple units with one wireless room thermostat please let us know at the time of ordering.

OPTIONAL – SMART THERMOSTAT


All our wireless models can be supplied with App controllable thermostat. Please contact us for more info.

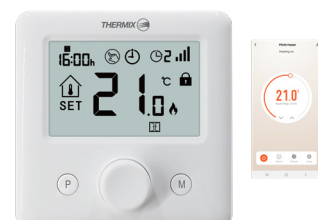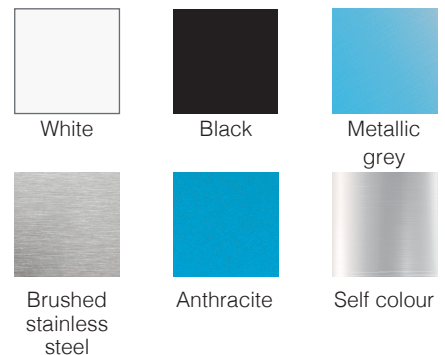


KPH-1300 | 1500 | 1800 | 2100 Models

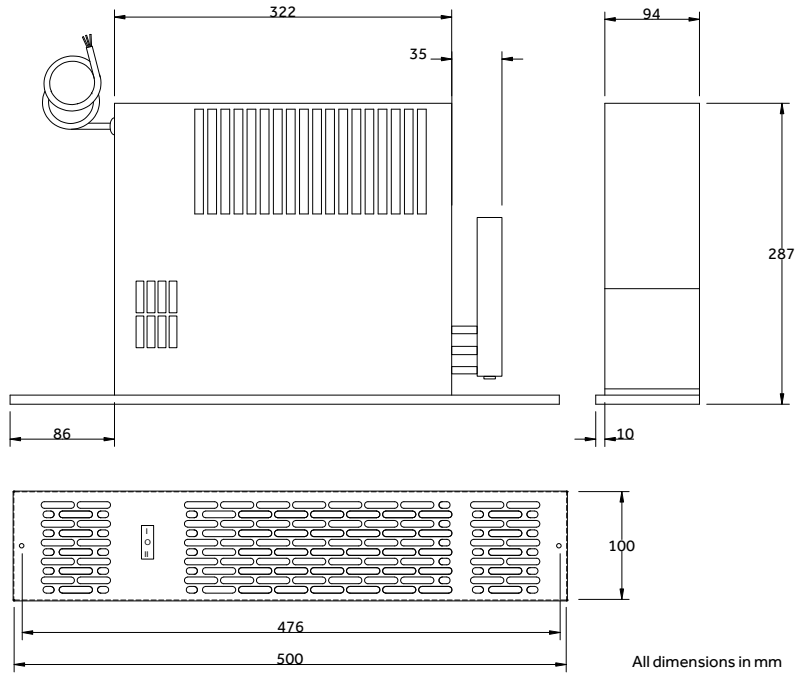

KPH-2400 Models

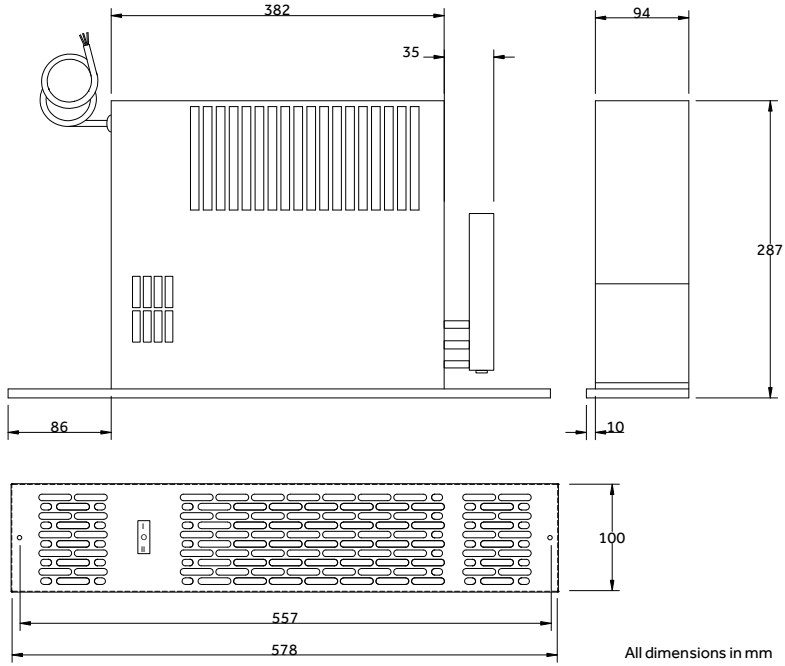

KPH-1400LVDC Models

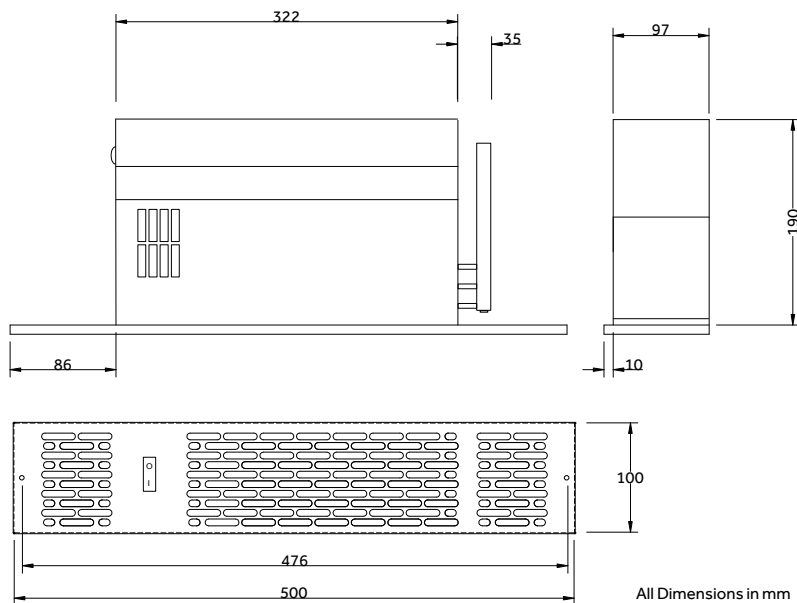

Technical Specifications

Models	Room size Guide	Output @ 70°C Watts (BTU)		Output @ 50°C Watts (BTU)		Motor power (watts)		Pipe connection	Flexible hose	Wireless Thermostat	Smart WiFi
		Normal	Boost	Normal	Boost	Normal	Boost				
KPH-1300B	22m ³	1300 (4430)	N/A	700 (2400)	N/A	15	-	15mm	No	No	No
KPH-1500C	27m ³	1260 (4430)	1450 (4950)	700 (2400)	800 (2730)	15	19	15mm	Yes	No	No
KPH-1800C	36m ³	1505 (5135)	1702 (5800)	738 (2520)	840 (2870)	16	20	15mm	Yes	No	No
KPH-2100C	45m ³	1669 (5700)	1861 (6350)	1039 (3545)	1270 (4330)	16	20	15mm	Yes	No	No
KPH-2400C	53m ³	1820 (6200)	2100 (7165)	1220 (4160)	1370 (4670)	17	21	15mm	Yes	No	No
KPH-1500W	27m ³	1260 (4300)	1450 (4950)	700 (2400)	800 (2730)	15	19	15mm	Yes	Yes	No
KPH-1800W	36m ³	1505 (5135)	1702 (5800)	738 (2520)	840 (2870)	16	20	15mm	Yes	Yes	No
KPH-2100W	45m ³	1669 (5700)	1861 (6350)	1039 (3545)	1270 (4330)	16	20	15mm	Yes	Yes	No
KPH-2400W	53m ³	1820 (6200)	2100 (7165)	1220 (4160)	1370 (4670)	17	21	15mm	Yes	Yes	No
KPH-1500SW	27m ³	1260 (4300)	1450 (4950)	700 (2400)	800 (2870)	15	19	15mm	Yes	Yes	Yes
KPH-1800SW	36m ³	1505 (5135)	1702 (5800)	738 (2520)	840 (2870)	16	20	15mm	Yes	Yes	Yes
KPH-2100SW	45m ³	1669 (5700)	1861 (6350)	1039 (3545)	1270 (4330)	16	20	15mm	Yes	Yes	Yes
KPH-2400SW	53m ³	1820 (6200)	2100 (7165)	1220 (4160)	1370 (4670)	17	21	15mm	Yes	Yes	Yes
KPH-1400LV	26m ³	1400 (4800)	N/A	700 (2400)	N/A	4	-	15mm	Yes	No	No

Note: All the heat outputs are tested in accordance with BS4856 using the entering water temperature and 340 l/h flow rate. Room size guide for guidance only based on the entering water temperature of 75°C.

**MADE IN
BRITAIN**

fsb⁰⁸
MEMBER



Most Innovative Heating Product Manufacturer 2020



THERMIX 

Thermix UK Ltd, The North Colchester Business Centre,
340 The Crescent, Colchester CO4 9AD

www.thermix.co.uk | email: technical@thermix.co.uk | Tel: 01206 618080